

Thermal Transfer Ribbons

Rough texture

Sharp, reliable prints on tough, textured surfaces.



Key benefits of using this ribbon:

- Excellent sensitivity and compatibility with rough substrates such as uncoated papers, labels and Tyvek®
- Very good print quality at high speeds; sharp bar codes at 90°
- ✓ Very good resistance to smudging and abrasion
- Excellent light resistance

Ideal for printing on:

Printing bar codes, logos, text, graphics, batch numbers and real-time dates directly on packaging materials.

Featuring advanced backcoat technology, all Videojet ribbons help ensure excellent print quality and extended printhead life.

Designed for:


Videojet Rough Texture Ribbons are designed for optimal performance in the Videojet* DataFlex* line of thermal transfer printers. Available in 55mm width by 1,000 meter length.









What to expect

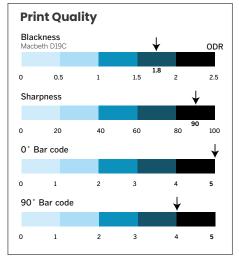

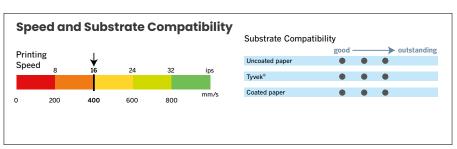

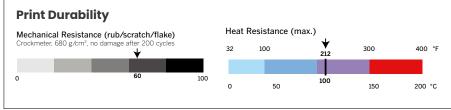

Rough Texture

Thermal Transfer Ribbons

Specifications

PET Film

Thickness: 4.5µm

Backcoating

Silicon based with anti-static properties. Friction coefficient: Kd<0.2

Ink

Wax/resin blend

Melting point

80°C (176°F)

Thickness

(Black): <8µm

Maximum printing speed

400mm/s (16inches/sec)

Storage

12 months, 5-35°C (40-95°F); 20-80% relative humidity

Available Colors

• (K) Black

Certifications and approvals

Heavy metals

This ribbon is compliant with European Directive 94/62/EC

RoHS/WEEE

This ribbon is compliant with EC directives 2002/95 and 2002/96

REACH

This ribbon is compliant with REACH requirements. It does not contain the Substances of Very High Concern (SVHC).

CP65


This ribbon is free from the substances listed in the California Proposition 65 lists

Food contact

This ribbon is compliant with the European Directive 1935/2004/EC

Halogen

This ribbon is halogen-free

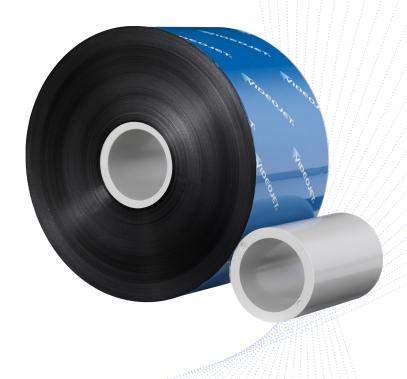



Call 800-843-3610 Email info@videojet.com or visit www.videojet.com Videojet Technologies Inc. 1500 Mittel Blvd. Wood Dale IL 60191 / USA